INTRODUCING

Com-Paint 2K Spray Paint

India's First **IPA, Xylene & Gasoline Resistant** 2K Aerosol

Com-Paint 2K Spray Paint is engineered to deliver professional-grade performance with the simplicity of an aerosol can. Its **dual-component 2K chemistry** ensures a tough, resilient finish — rivalling spray-gun coatings without any compressor setup.

Designed for Indian conditions, it offers excellent hardness and long-term gloss retention — making it ideal for automotive, metal, and industrial applications.

Activate • Shake • Spray

Key Features & Benefits ✨

True 2K System

Mix-in hardener for maximum cross-linking and durability.

Mirror Gloss

High solids and excellent flow for a premium finish.

Extended Pot Life

Usable for up to **72 hours** after activation.

© 2026 Aeroaids Corporation | All Rights Reserved

Superior Durability

Outstanding resistance to UV, abrasion, and chemical attack.

High Coverage

Up to **3m² per Can !** Efficient and economical.

Easy Application

No compressor needed: Ready to use straight from the can.

Technical Highlights 📊

PROPERTY	COM-PAINT 2K SPRAY PAINT	BENCHMARK
Pot Life (Activated)	**Up to 72 hrs @ 25°C**	12–24 hrs
Touch Dry	**4 – 8 min**	7 - 8 min
Chemical Resistance	**Excellent (IPA, Xylene, Gasoline)**	Moderate
Gloss Level (60°)	85 GU ±3	80 GU ±3
Coverage	2–3 m² per can	2–3 m² per can

🛠️How to Use

1. **Clean:** Ensure the surface is dry and free from dust, grease, and wax.
2. **Activate:** Press the bottom cap firmly until you hear the **"POP"** (This mixes the hardener).
3. **Shake:** Mix the paint and hardener for at least 2 minutes.
4. **Spray:** Apply from 20–25 cm distance in smooth, overlapping strokes.
5. **Cure:** Allow 72 hours for full drying before polishing or handling.

Aeroaids Corporation

Head Office: 42, DLF Industrial Area, Kirti Nagar, Delhi - 110015
BG Works: 341, M.I.E., Part - A, Bahadurgarh - 124507, Haryana
RP Works: Nagagher, Rishikesh Road, Ranipokhri- 248145, Uttarakhand
PU Works: Gat No. 37, Pathare Compound, Chimbali - 412105, Pune, Maharashtra

+91 1147374737 sales@com-paint.com www.com-paint.com

© 2026 Aeroaids Corporation | All Rights Reserved

2K AEROSOL SPRAY CAN: ANATOMY & USAGE PROCEDURE

SECTION 1 — CAN ANATOMY

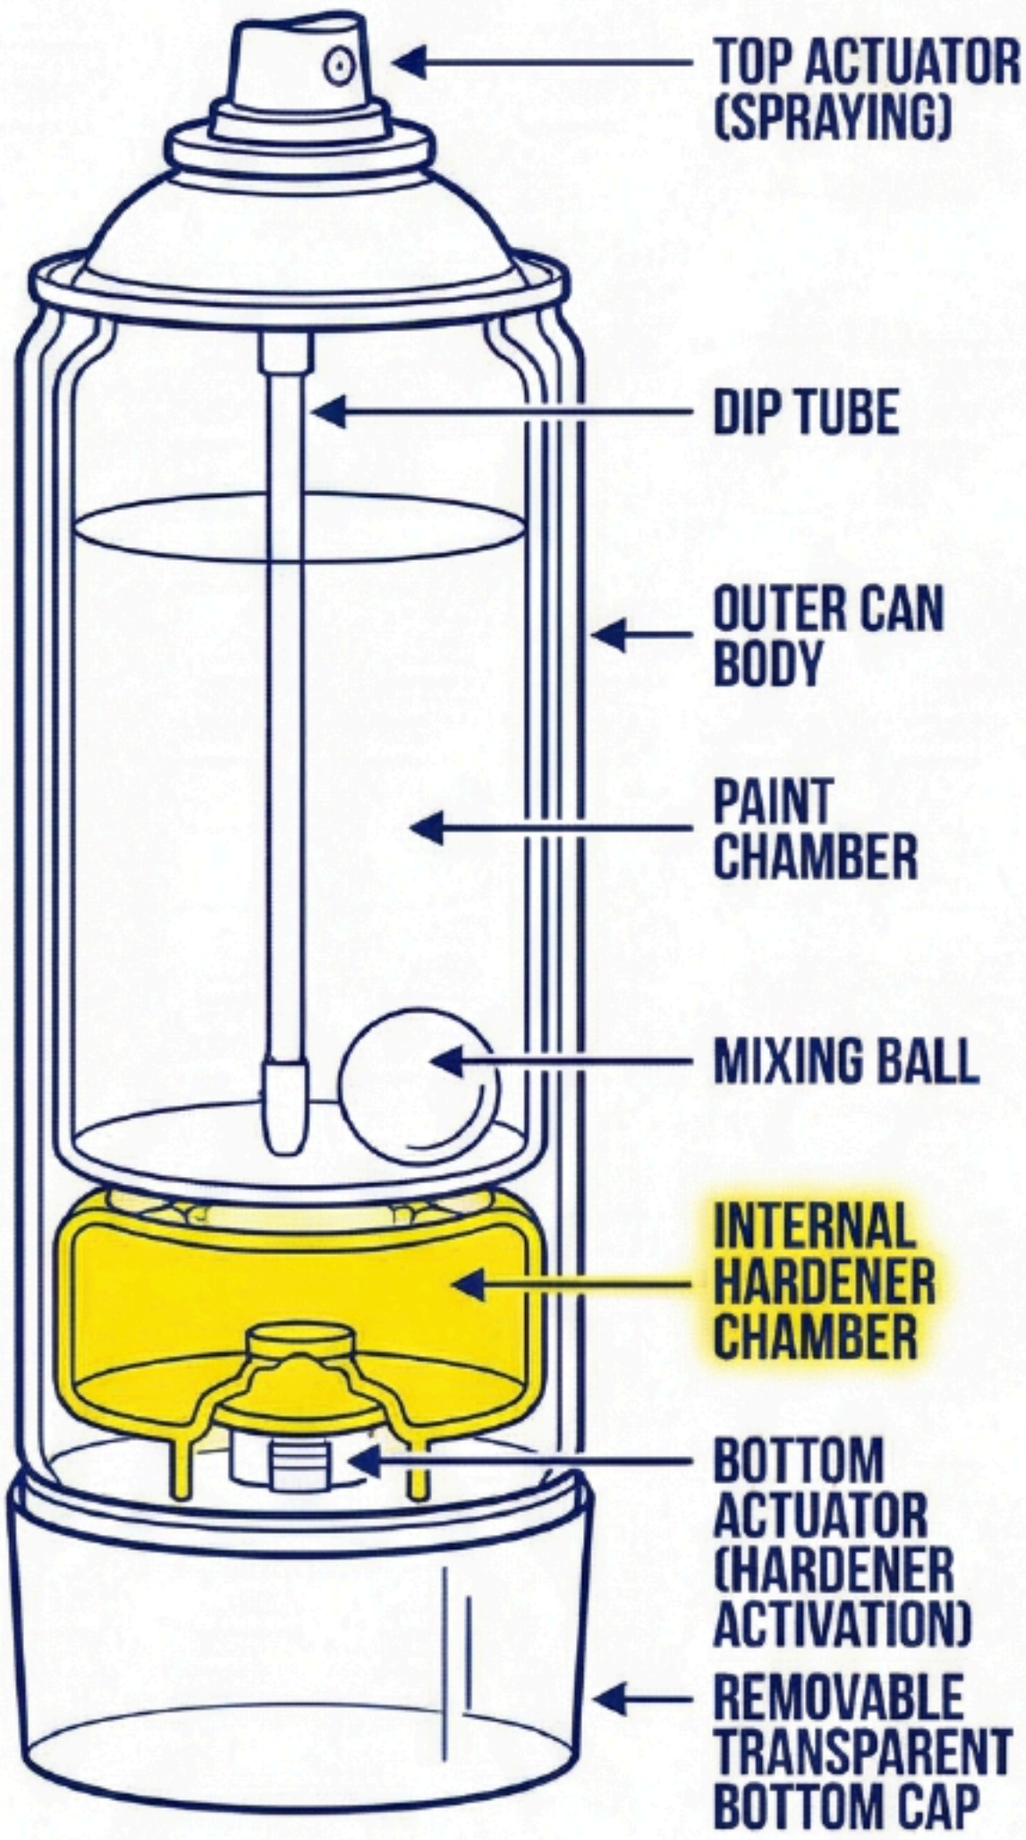

SECTION 2 — ACTIVATION

A. REMOVE BOTTOM CAP

User removes the transparent cap ONLY from the bottom side. Top actuator untouched.

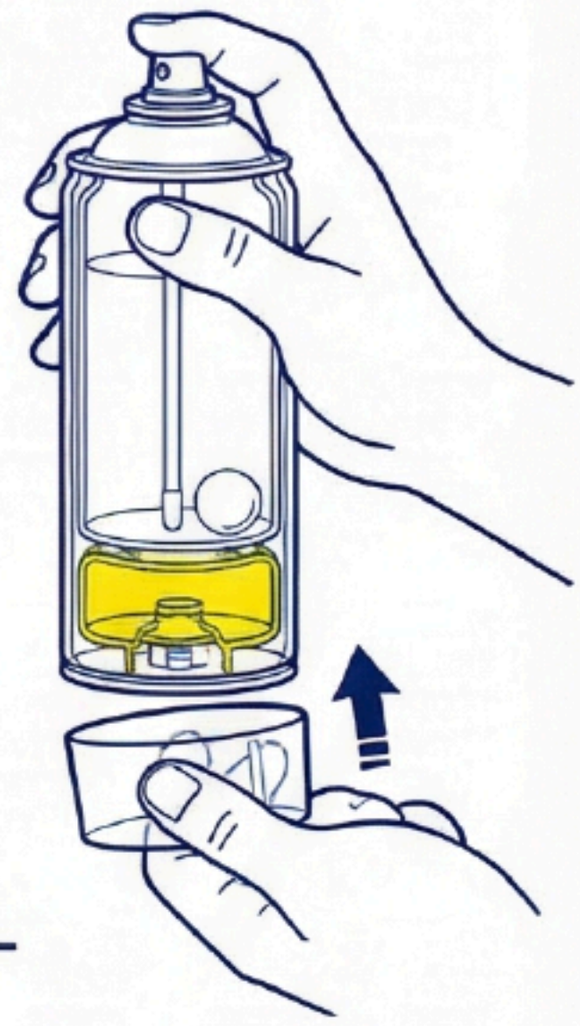

B. ACTIVATE HARDENER — PRESS BOTTOM ACTUATOR ON FLOOR

Can remains upright (NOT inverted). User presses the bottom actuator directly against a flat hard surface. Impact lines and 'POP' indicate activation.

SECTION 3 — MIXING

Vigorously shake the upright can for 1-2 minutes to ensure proper mixing of hardener and paint.

SECTION 4 — SPRAYING

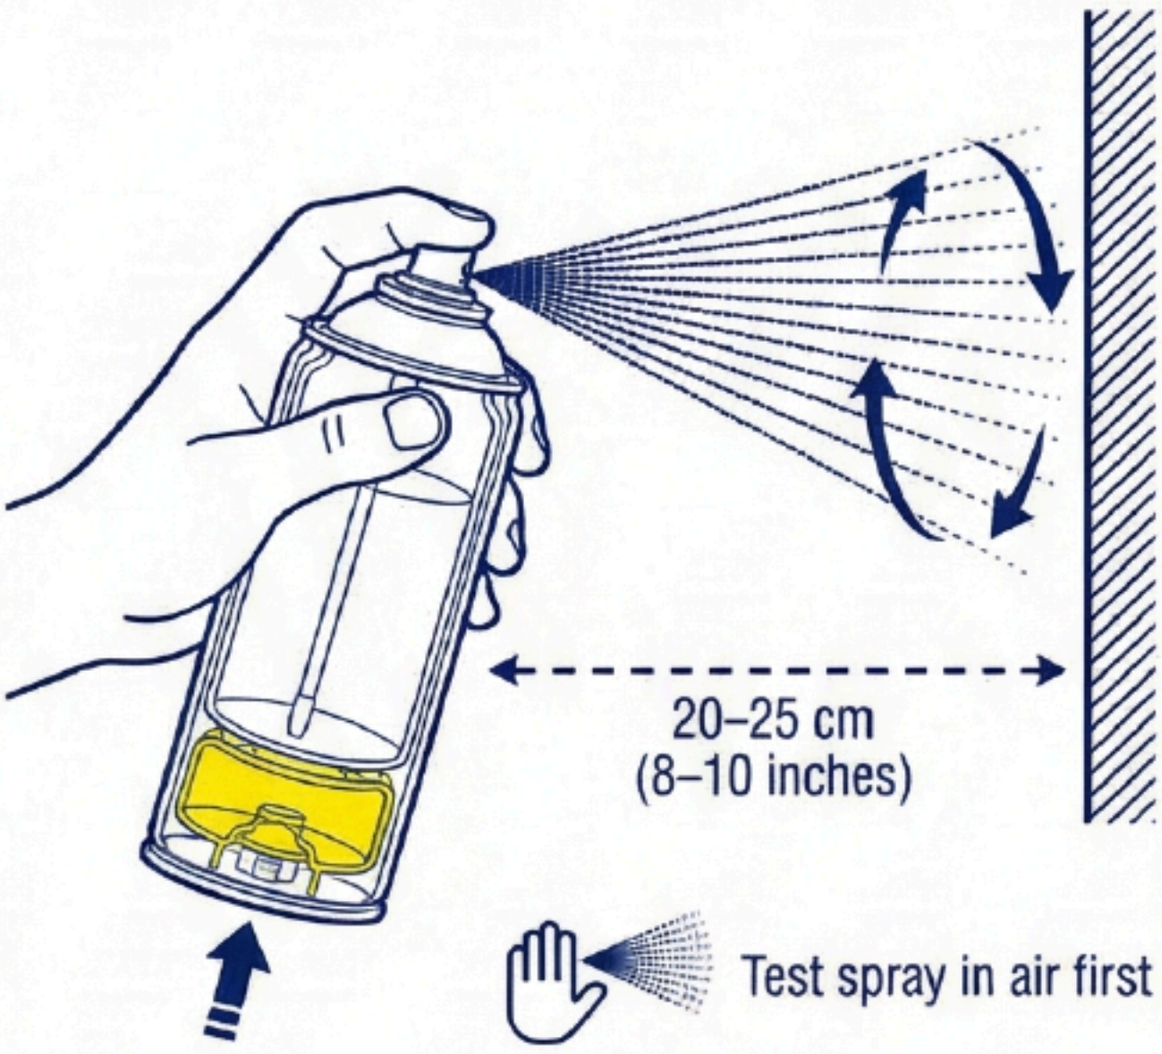

Test spray in air first

SECTION 5 — CURING

CURING TIME: 72 HOURS

SECTION 6 — POT LIFE WARNING

ONCE ACTIVATED, THE MIXED PAINT HAS A POT LIFE OF 72 HOURS. AFTER THIS TIME, THE PAINT WILL CURE AND BECOME UNUSABLE.

© 2026 Aeroaids Corporation | All Rights Reserved